

# SICOM3432G



## Layer 2 32G/28G +4 x10G Port Full Gigabit Managed Rack Mountable Switches

- Supports combo gigabit ports with option of 1000 Base-T(X) RJ45 or 1000 Base-X Fiber
- Support Max four 10 gigabit ports, 32 gigabit ports
- Supports DRP/DHP ,STP/RSTP/MSTP,ERPS(G.8032) for network redundancy
- Supports Qos,VLAN, SNMP v1/v2/v3, RMON(1,2,3,9 Group)
- Supports SFP Digital Diagnostics Monitoring
- Support PTPv2
- IP40 protection class



## » Overview

SICOM3432G is a full Gigabit layer 2 managed industrial Ethernet switch designed to operate reliably in climatically demanding utility and industrial environments. SICOM3432G is a 19-inch 1U rack mountable device, supports up to four 10 Gigabit ports, 32 Gigabit ports. SICOM3432G supports many Layer 2 software features such as port, VLAN, multicast, QoS, fast redundant ring. It supports Console, Telnet, Web management and network management software based on SNMP. At present, the product is widely used at the oil & gas, distribution network automation and many other industrial communication systems.

## » Product Specifications

### **Switching function**

Supports VLAN, PVLAN  
Supports port aggregation  
Supports flow control  
Supports broadcast storm suppression  
Supports port rate limit

### **Redundancy protocol**

Supports ERPS(G.8032)  
Supports DRP/DHP with recovery time<20 ms  
Supports RSTP/MSTP and compatible with STP

### **Multicast protocol**

Supports Static multicast  
Supports GMRP  
Supports IGMP snooping  
Supports PIM SM(pending) and PIM DM(pending)

### **Routing protocol**

Supports static routing

### **Security**

Supports IEEE 802.1x  
Supports HTTPS/SSL,SFTP Client  
Supports SSH  
Supports RADIUS  
Supports user classification

### **Service quality management**

Supports ACL  
Supports 802.1p and TOS/DiffServ, SP and WRR queuing

### **Management and maintenance**

Supports Console, Telnet, and Web management methods  
Supports SNMPv1/v2c/v3 and can managed by Kyvision  
Supports file transfer and software update over FTP and TFTP  
Supports RMON  
Supports the IP/MAC address conflict alarm, power failure alarm, port alarm, and ring alarm  
Supports port mirroring  
Supports Syslog  
Supports LLDP  
Supports DDM

### **IP address management**

Supports DHCP Server/Client/Server option 82

### **Clock management**

Supports SNTP Client  
Supports NTP  
Supports PTPv2

## Technical Specifications

### Standard

IEEE 802.3i(10Base-T)  
IEEE 802.3u(100Base-TX and 100Base-FX)  
IEEE 802.3ab(1000Base-T)  
IEEE 802.3z(1000Base-SX/LX)  
IEEE 802.3ae(10GBase-X)  
IEEE 802.3ad (port aggregation)  
IEEE 802.3x (flow control)  
IEEE 802.1p (priority)  
IEEE 802.1Q(VLAN)  
IEEE 802.1w(RSTP)  
IEEE 802.1s(MSTP)  
IEEE 802.1x

### Switch Properties

Priority queue: 8  
Number of VLANs: 4K  
VLAN ID: 1–4093  
Number of multicast groups: 256  
Routing table: 3.9K  
MAC table: 16K  
Packet buffer: 32Mbit  
Packet forwarding rate: 107 Mpps

### Interface

10 Gigabit ports: 10GBase-X, SFP+ port  
Gigabit ports: 1000Base-X, SFP port  
10/100/1000Base-T(X): RJ45 port  
Console port: RS232, RJ45  
Alarm: 3-pin 5.08mm-spacing plug-in terminal block, 250 VAC/220 VDC  
Max, 2A Max, 10A@1s, 60W Max

### LED

Alarm LED: Alarm  
Running LED: Run  
Power LED: PWR1, PWR2  
Port LED: Link/ACT

### Power Requirements

Power input: 220AC/DC(85-264VAC/120-300VDC); 24-48VDC(18-72VDC)  
Power consumption: < 40 W  
Overload protection: Support  
Reverse connection protection: Support  
Redundancy protection: Support

### Physical Characteristics

Housing: Metal  
Cooling: Natural cooling, fanless  
Protection Class: IP40  
Dimensions(W×H×D): 483 mm × 44mm × 245mm  
Weight: 4 Kg  
Mounting: 19 inch rack mounting

### Environmental Limits

Operating temperature: -40°C to +75°C (-40°F to 167°F)  
Storage temperature: -40°C to +85°C (-40°F to 185°F)  
Ambient Relative Humidity: 5% to 95% (non-condensing)

### Quality Assurance

MTBF: 460670h  
Warranty: 5 years


### Industrial Standard

EMI:  
FCC CFR47 Part 15, EN55022/CISPR22, Class A

EMS:  
IEC61000-4-2(ESD) ±6kV(contact), ±8kV(air)  
IEC61000-4-3(RS) 10V/m(80MHz-2GHz)  
IEC61000-4-4(EFT) Power Port: ±2kV; Data Port: ±1kV  
IEC61000-4-5(Surge) Power Port: ±2kV/DM, ±1kV/CM; Data Port: ±2kV  
IEC61000-4-6(CS) 10V(150kHz-80MHz)  
IEC61000-4-16(common mode conduction) 30V(cont.), 300V(1s)

Machinery:  
IEC60068-2-6 (vibration), IEC60068-2-27 (shock), IEC60068-2-32 (free fall)

## Mechanical Drawing

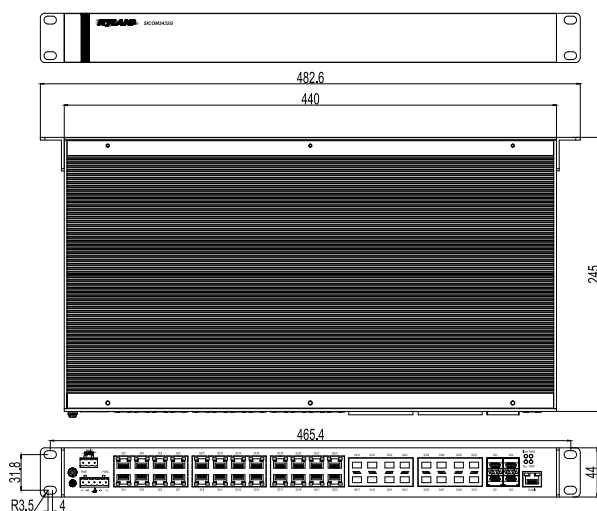

## Ordering Information

### SICOM3432G-Ports-PS

#### Ports:

##### 4X8G8GX16GE:

4×10GBase-X SFP+ ports;  
8×1000Base-X, 10/100/1000Base-T(X) Combo ports;  
8×1000Base-X SFP ports;  
16×10/100/1000Base-T(X) ports

##### 4X24GE:

4×10GBase-X SFP+ ports;  
24×10/100/1000Base-T(X) ports

##### 8G8GX16GE:

8×1000Base-X, 10/100/1000Base-T(X) Combo ports;  
8×1000Base-X SFP ports;  
16×10/100/1000Base-T(X) ports

##### 4GX24GE:

4×1000Base-X SFP ports;  
24×10/100/1000Base-T(X) ports

#### PS:

HV-HV=220AC/DCW(85-264VAC/77-300VDC), redundant power supplies  
L2-L2=24-48VDC(18-72VDC), redundant power supplies  
HV=220AC/DCW(85-264VAC/77-300VDC), single power supply  
L2=24-48VDC(18-72VDC), single power supply