

Opal10GL

10G port full gigabit unmanaged DIN-Rail switches



» Overview

Opal10GL unmanaged 10-port switch is characterized by its full Gigabit interface, compact size, economical and plug-and-play design, generally used to connect the high bandwidth Ethernet in factory automation, petrochemical, ITS, and other applications. Opal10GL supports 2 Gigabit SFP ports and up to 8 10/100/1000Base-TX RJ45 ports, redundant power inputs, built-in isolated power supply, metal housing with IP30 protection class, thus ensuring fast and reliable data transmission in harsh industrial environments. Opal10GL provides both standard (-10°C to 60°C) and wide (-40°C to 75°C) operating temperature range models to meet different applications.

» Key Features

Support 2 Gigabit SFP ports, 8 10/100/1000Base-T(X) ports

Built-in isolated power supply, Full load power consumption is as low as 5.2 W

Both standard and wide operating temperature models are available

Jumbo frame transmission function (up to 9KB)

EMC level 3

IP30 protection class

Product Specifications

>Technical Specification

-Standard

IEEE 802.3i (10Base-T)

IEEE 802.3u (100Base-TX)

IEEE 802.3ab(1000Base-T)

IEEE 802.3z (1000Base-X)

-Switch Properties

MAC Table: 4K

Packet Buffer: 1.5Mbit

Packet Forwarding Rate: 14.9Mpps

Switching Delay:<5μs

Jumbo Frame Size: 9KB

-Interface

Gigabit Port:

1000Base-X, SFP slot

10/100/1000Base-T(X), RJ45 port

-LED

LEDs on Front Panel

Power LED: PWR1, PWR2

Interface LED: Link/ACT, Speed (RJ45 port); Link/ACT (Fiber port)

-Power Requirements

Power Input: 12-48VDC/18-30VAC

Power Terminal: 4-pin 5.08mm-spacing plug-in terminal block

Power Consumption:<5.2W

Overload Protection: Support

Reverse Protection: Support

Redundancy Protection: Support

-Physical Characteristics

Housing: Metal

Cooling: Natural convection, fanless

Protection Class: IP30

Dimension: 53.6mm×135mm×108mm (W×H×D)

Weight: 0.5Kg

Mounting: DIN-Rail or Panel Mounting

-Environmental Limits

Operating Temperature:

-10°C to +60°C (-E)

-40°C to +75°C

Storage Temperature: -40°C to +85°C

Ambient Relative Humidity: 5–95% (non-condensing)

-Quality Assurance

MTBF: 7177513 hrs

Warranty: 5 years

-Approvals

CE, FCC, UL61010, Class I Div 2 (Pending)

-Industry Standard

EMI:

FCC CFR47 Part 15, EN55032/CISPR22, Class A

EMS:

IEC61000-4-2(ESD): ±6kV (contact), ±8kV (air)

IEC61000-4-3(RS): 10V/m (80MHz–2GHz)

IEC61000-4-4(EFT): Power Port: ±4kV; Data Port: ±2kV

IEC61000-4-5(Surge): Power Port: ±1kV/DM, ±2kV/CM; Data Port: ±2kV


IEC61000-4-6(CS): 10V (150kHz–80MHz)

Machinery:

IEC60068-2-6 (Vibration)

IEC60068-2-27 (Shock)

IEC60068-2-32 (Free Fall)

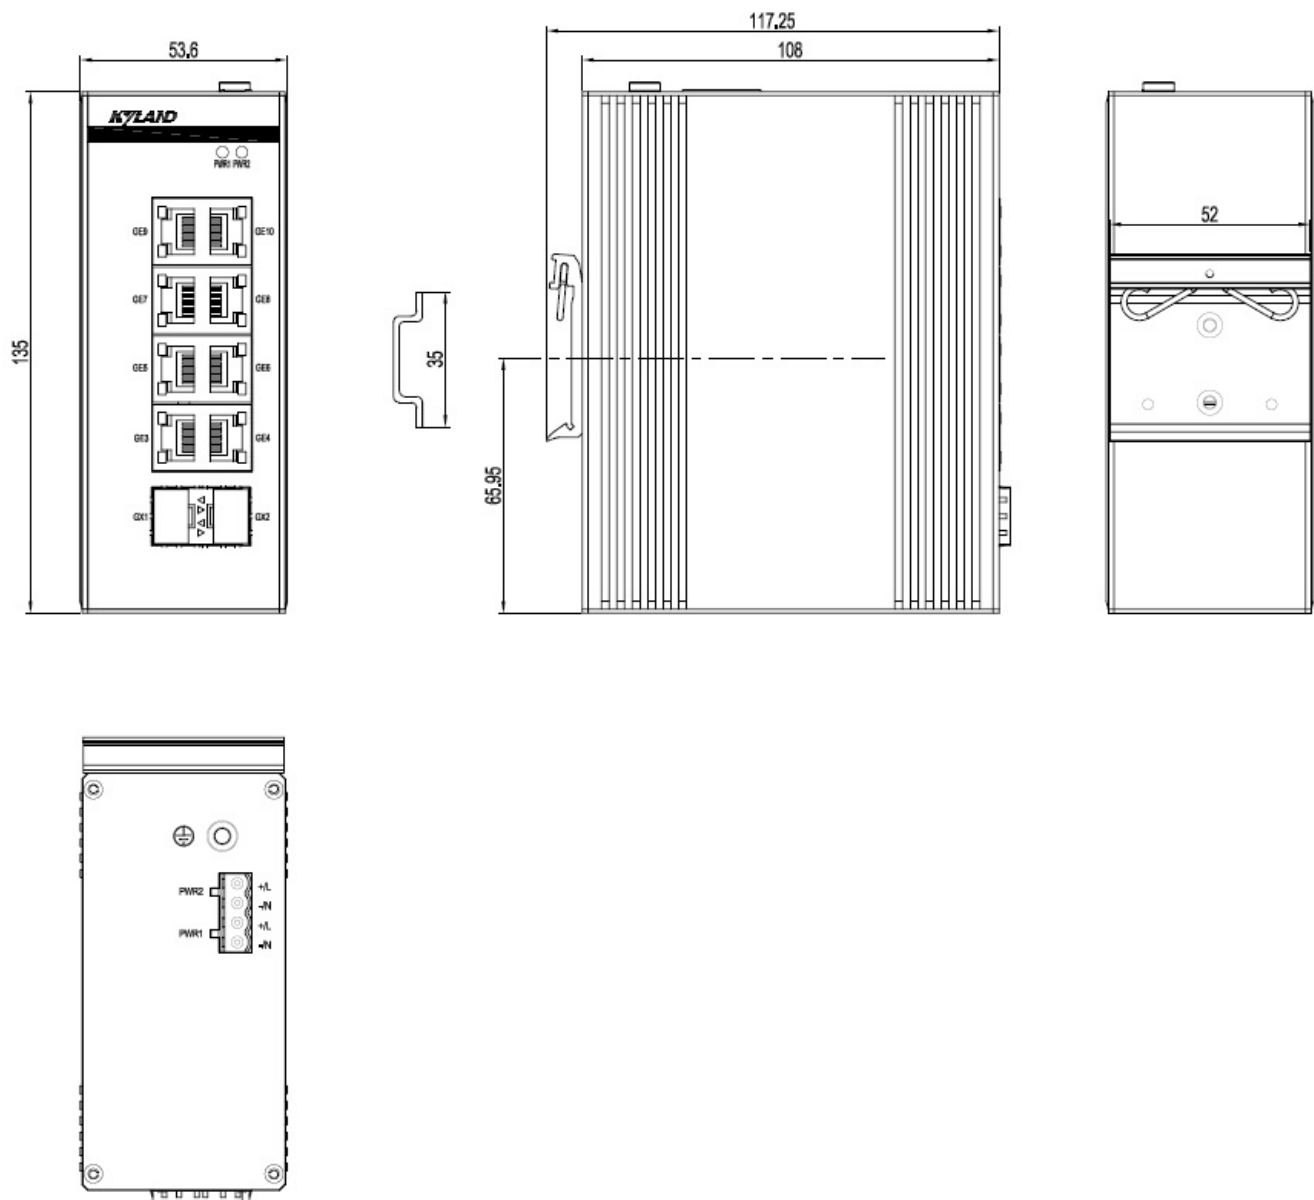

» Ordering Information

Opal10GL-X-Ports-PS1-PS2	
X	Operating temperature range
E	-10 to +60°C operating temperature
None	-40 to +75°C operating temperature
Ports	
2GX8GE	2 X 1000Base-X SFP slots, 8 X 10/100/1000Base-T(X) RJ45 ports
2SFP8GE	2 X 100Base-X SFP slots, 8 X 10/100/1000Base-T(X) RJ45 ports
8GE	8 X 10/100/1000Base-T(X) RJ45 ports
PS1-PS2	
LV-LV	12-48VDC/18-30VAC, redundant power inputs

Accessories	
Gigabit SFP module	Please refer to the Gigabit SFP module ordering list
100Base-X SFP module	Please refer to the 100Base-X SFP module ordering list
DT-BGAZ-02	Panel for Panel mounting
DT-FCZ-RJ45-01	Dustproof cover for RJ45 port

Version:2022-04-07 16:40:10